

TB40

Multimedia Player



Specifications

Change History

Document Version	Release Date	Description
V1.2.1	2024-10-20	Updated the feature description.
V1.2.0	2024-07-24	<ul style="list-style-type: none"> • Updated the feature description. • Updated the RUN indicator description. • Added the recommended supply power. • Updated the packing information. • Updated the media decoding specifications.
V1.1.0	2024-05-30	<ul style="list-style-type: none"> • Updated the introduction. • Updated the feature description. • Updated the connector description. • Updated the media decoding specifications.
V1.0.9	2023-09-28	<ul style="list-style-type: none"> • Changed the description of the default Wi-Fi AP password. • Changed the internal storage capacity from 16 GB to 32 GB.
V1.0.8	2023-07-20	Updated the appearance picture of the product.
V1.0.7	2023-06-14	Updated the connector descriptions.
V1.0.6	2022-11-18	Updated the certification information.
V1.0.5	2022-08-30	Updated the appearance pictures.
V1.0.4	2022-06-10	<ul style="list-style-type: none"> • Added a description of RF synchronization. • Added notes and cautions. • Updated the certification information. • Updated the indicator descriptions. • Updated the accessory descriptions.
V1.0.2	2021-12-17	<ul style="list-style-type: none"> • Updated the descriptions of the USB (Type B) port and Gigabit Ethernet port. • Added the gross weight of the product. • Added a note for the power consumption.
V1.0.1	2021-09-30	<ul style="list-style-type: none"> • Added certification information. • Updated the description of the playback performance.
V1.0.0	2021-07-30	First release

Introduction

The TB40 is a new generation of multimedia player created by NovaStar for full-color LED displays. This multimedia player integrates playback and sending capabilities, allowing users to publish content and control LED displays with a computer, mobile phone, or tablet. Working with our superior cloud-based publishing and monitoring platforms, the TB40 enables users to manage LED displays from an Internet-connected device anywhere, anytime.

Support for multi-screen synchronous playback and synchronous and asynchronous modes makes this multimedia player a perfect fit for a wide range of applications.

Thanks to its reliability, ease of use, and intelligent control, the TB40 becomes a winning choice for commercial LED displays and smart city applications such as fixed displays, lamp-post displays, chain store displays, advertisement players, retail store displays, door head displays, shelf displays, and much more.

Certifications

CQC, SRRC, RoHS

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem.

Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

Output

- Loading capacity up to 1,300,000 pixels
 - Maximum width: 4096 pixels, maximum height: 4096 pixels
 - Non-standard resolutions can be customized in both asynchronous and synchronous modes and the pixel clock of the custom resolutions cannot exceed 153 MHz.

- 2x Gigabit Ethernet ports

All these two ports serve as primary by default. Users can also set one as primary and the other as backup.

- 1x Stereo audio connector

The audio sample rate is fixed at 48 kHz. If NovaStar's multifunction card is used for audio output, audio with a sample rate of 48 kHz is required.

- 1x HDMI 1.3 connector

Maximum output: 1920×1200@60Hz and support for HDMI loop

Input

- 1x HDMI 1.3 connector

In synchronous mode, this connector is used as the video source which can be scaled to fit the entire screen automatically.

- 2x sensor connectors

Connect to the brightness sensor or temperature and humidity sensor.

Control

- 1x USB 3.0 (Type A) port

Allows for USB playback, firmware upgrade and storage expansion.

- 1x USB (Type B) port

Connects to the control computer for content publishing and screen control.

- 1x Gigabit Ethernet port

Connects to the control computer, a LAN or public network for content publishing and screen control.

Performance

- Powerful processing capacity
 - Quad-core ARM A55 processor @1.8 GHz
 - Support for H.264/H.265 4K@60Hz video decoding
 - 1 GB of onboard RAM
 - 32 GB of internal storage

- Flawless playback

Support for playback of 1x 4K, 2x 1080p, 4x 720p, 4x 480p, or 6x 360p videos

Functionality

- All-round control plans
 - Enables users to publish content and control screens from a computer, mobile phone, or tablet.
 - Allows users to publish content and control screens from anywhere, anytime.
 - Allows users to monitor screens from anywhere, anytime.
- Wi-Fi AP and Wi-Fi Sta can be turned on at the same time
 - W-Fi AP

User terminal devices can connect to the built-in Wi-Fi hotspot of the multimedia player. The default SSID is “AP+ *Last 8 digits of SN*” and the default password is printed on the SSID label.
 - Wi-Fi AP+Wi-Fi Sta

Users can connect the multimedia player to a Wi-Fi network and turn on the Wi-Fi hotspot at the same time.
- Synchronous and asynchronous modes
 - In asynchronous mode, the internal video source works.
 - In synchronous mode, the HDMI video source works.
- Synchronous playback across multiple screens

Enabling synchronous playback halves the number of videos that can be played simultaneously within the decoding capability of the device.


 - NTP time synchronization
 - GPS time synchronization (The specified 4G module must be installed.)
 - RF time synchronization (The specified RF module must be installed.)
- Support for 4G/5G modules

The device ships without a 4G/5G module. Users have to purchase 4G/5G modules separately if needed.

Network connection priority: Wired network > Wi-Fi network > 4G/5G network (This order of priority is followed when the firmware is earlier than V4.5.0. The networks coexist when the firmware is V4.5.0 or later.)

Appearance

Front Panel

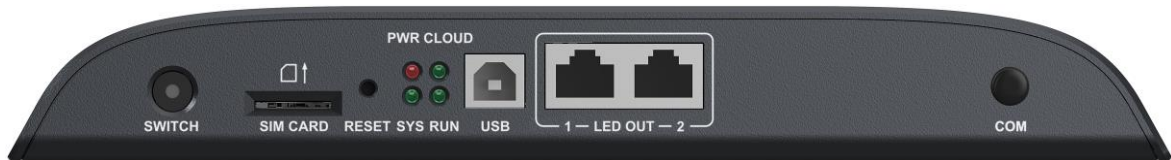


Name	Description
SWITCH	Switches between synchronous and asynchronous modes. <ul style="list-style-type: none"> • Staying on: Synchronous mode • Off: Asynchronous mode
SIM CARD	SIM card slot Capable of preventing users from inserting a SIM card in the wrong orientation.
RESET	Factory reset button Press and hold this button for 5 seconds to reset the product to its factory settings.
USB	USB (Type B) port Connects to the control computer for content publishing and screen control.
LED OUT	Gigabit Ethernet outputs
COM	Reserved RF antenna connector

Rear Panel



SENSOR	Sensor connectors Connect to the brightness sensor or temperature and humidity sensor.
HDMI	1x HDMI 1.3 OUT <ul style="list-style-type: none"> • Support for HDMI loop • Maximum output resolution: The pixel clock cannot exceed 153 MHz. • Maximum output: 1920×1200@60Hz • HDCP 1.4 compliant


	<ul style="list-style-type: none"> • No support for interlaced signal output • In asynchronous mode, output resolutions support 400×4096@60Hz and 480×4096@60Hz. • Support for custom resolutions: <ul style="list-style-type: none"> – Custom pixel width range: 512~4096 (512×512@60Hz~4096×560@60Hz) – Custom pixel height range: 512~3680 (512×512@60Hz~512×3680@60Hz) <hr/> <p>1x HDMI 1.3 IN</p> <ul style="list-style-type: none"> • Maximum input resolution: The pixel clock cannot exceed 153 MHz. • Maximum input: 1920×1200@60Hz • HDCP 1.4 compliant • No support for interlaced signal input • Support for custom resolutions: <ul style="list-style-type: none"> – Custom pixel width range: 512~4096 (512×512@60Hz~4096×560@60Hz) – Custom pixel height range: 512~3680 (512×512@60Hz~512×3680@60Hz) <p>Note: The resolution of HDMI IN can be customized by changing the preset EDID, so the external source must support custom resolutions.</p> <ul style="list-style-type: none"> • In synchronous mode, HDMI is used for video input and users can enable full-screen scaling to make the image to fit the screen automatically. <p>Requirements for full-screen scaling in synchronous mode:</p> <ul style="list-style-type: none"> – 512 pixels ≤ video source width ≤ 2048 pixels – 512 pixels ≤ video source height ≤ 2048 pixels – Maximum resolution: 1920×1080 – The image can only be scaled down and cannot be scaled up. <p>Note: The pixel width and height of the video source must be greater than or equal to the pixel width and height of the screen, respectively.</p>
WiFi	<p>Wi-Fi antenna connector (2.4 GHz Wi-Fi supported)</p> <p>Support for switching between Wi-Fi AP and Wi-Fi Sta</p>
ETHERNET	<p>Gigabit Ethernet port</p> <p>Connects to the control computer, a LAN or public network for content publishing and screen control.</p>
COM 2	<p>GPS antenna connector</p>
USB 3.0	<p>USB 3.0 (Type A) port</p> <p>Allows for USB playback, firmware upgrade and storage expansion.</p> <p>The Ext4 and FAT32 file systems are supported. The maximum size of a single file supported by FAT32 is 4 GB. The exFAT and FAT16 file systems are not supported.</p>

COM 1	4G antenna connector
AUDIO OUT	Audio output connector OMTP headphones can be connected.
12V  2A	Power input connector

Indicators

Name	Color	Status	Description
PWR	Red	Staying on	The power supply is working properly.
SYS	Green	Flashing once every 2s	The operating system is functioning normally.
		Staying on/off	The operating system is malfunctioning.
CLOUD	Green	Staying on	The device is connected to the Internet and the connection is available.
		Flashing once every 2s	The device is connected to VNNOX and the connection is available.
		Flashing once every second	The device is upgrading the operating system.
		Flashing once every 0.5s	The device is copying the upgrade package.
RUN	Green	Flashing once every 2s	The FPGA has no video source.
		Flashing once every 0.5s	The FPGA is functioning normally.
		Staying on/off	The FPGA loading is abnormal.

Dimensions

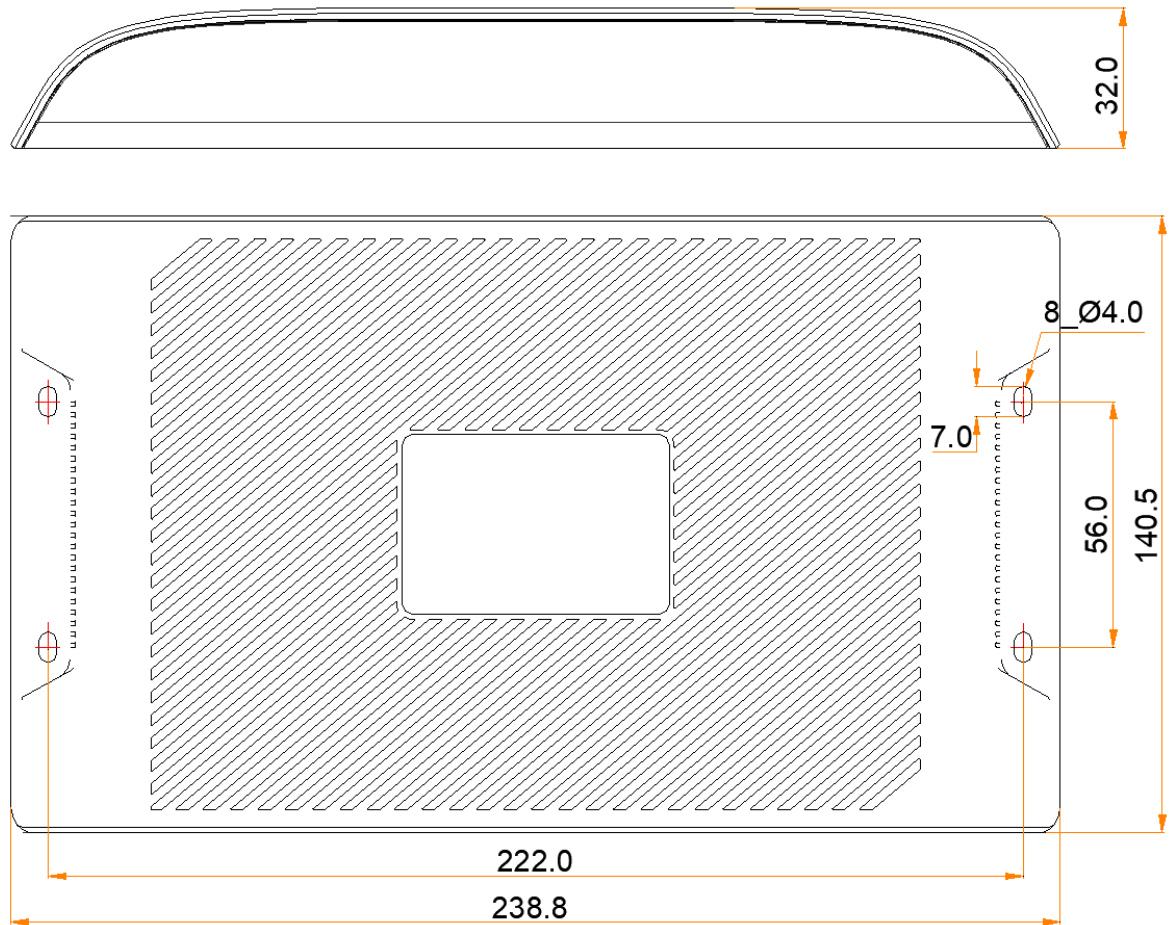

Tolerance: ± 0.3 Unit: mm

Specifications

Electrical Parameters	Input power	DC 12 V, 2 A
	Maximum power consumption	18 W
	Recommended supply power	25 W
Storage Capacity	RAM	1 GB
	Internal storage	32 GB
Operating Environment	Temperature	-20°C to +60°C
	Humidity	0% RH to 80% RH, non-condensing

Storage Environment	Temperature	-40°C to +80°C
	Humidity	0% RH to 80% RH, non-condensing
Physical Specifications	Dimensions	238.8 mm × 140.5 mm × 32.0 mm
	Net weight	430.0 g
	Gross weight	860.8 g Note: It is the total weight of the product, accessories and packing materials packed according to the packing specifications.
Packing Information	Dimensions	385.0 mm × 280.0 mm × 75.0 mm
	Accessories	<ul style="list-style-type: none"> • 1x Wi-Fi omnidirectional antenna • 1x AC power cord • 1x Quick Start Guide • 1x Certificate of Approval
IP Rating	IP20 Please prevent the product from water intrusion and do not wet or wash the product.	
System Software	<ul style="list-style-type: none"> • Android 11.0 operating system software • Android terminal application software • FPGA program Note: Third-party applications are not supported.	

The amount of power consumption may vary depending on various factors such as product settings, usage, and environment.

Media Decoding Specifications

Image

Codec	Max Resolution	Format	Remarks
JFIF file format 1.02	4096×2160 pixels	JPG, JPEG	No support for non-interlaced scan Support for SRGB JPEG Support for Adobe RGB JPEG
BMP	4096×2160 pixels	BMP	N/A

Codec	Max Resolution	Format	Remarks
GIF	4096×2160 pixels	GIF	N/A
PNG	4096×2160 pixels	PNG	N/A
WEBP	4096×2160 pixels	WEBP	N/A

Video

Codec	Resolution	Max Frame Rate	Max Bit Rate (Ideal Case)	Format	Remarks
MPEG-1/2	48×48 pixels to 1920×1088 pixels	30fps	80Mbps	DAT, MPG, VOB, TS	Support for Field Coding
MPEG4	48×48 pixels to 1920×1088 pixels	30fps	38.4Mbps	AVI, MKV, MP4, MOV, 3GP	No support for MS MPEG4 v1/v2/v3 and GMC
H.264	16×16 pixels to 4096×2304 pixels	2304p@30fps	80Mbps	AVI, MKV, MP4, MOV, 3GP, TS, FLV	Support for Field Coding, MBAFF, and High&High 10 Profile
H.264 MVC	16×16 pixels to 4096×2304 pixels	2304p@30fps	100Mbps	MKV, TS	Support for Stereo High Profile only
H.265/HEVC	64×64 pixels to 4096×2304 pixels	2304p@60fps	100Mbps	MKV, MP4, MOV, TS	Support for Main & Main 10 Profile and Tile & Slice
VP8	48×48 pixels to 1920×1088 pixels	30fps	38.4Mbps	WEBM, MKV	N/A
VP9	64×64 pixels to 4096×2304 pixels	60fps	80Mbps	WEBM, MKV	N/A
H.263	SQCIF(128×96) QCIF(176×144) CIF(352×288) 4CIF(704×576)	30fps	38.4Mbps	3GP, MOV, MP4	No support for H.263+

Codec	Resolution	Max Frame Rate	Max Bit Rate (Ideal Case)	Format	Remarks
MJPEG	48×48 pixels to 1920×1088 pixels	60fps	60Mbps	AVI	N/A

Notes and Cautions


This is Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

TECNOGROUP
LED TECHNOLOGY EXPERTS

Tel: +56 9 5449 1032
Email: contacto@tecnogroup.cl

Casa Matriz
Padre Hurtado Central 580
Las Condes, Santiago de Chile

www.tecnogroup.cl

 @tecnogroup.cl  #tecnogroup.cl  Tecnogroup Chile

Tel: 833 533 4255
Email: info@tecnogroup.us

Showroom Miami
759 NW. 24th ST.
Miami, FL 33127

www.tecnogroup.us

 @tecnogroup.us  #tecnogroup.us  Tecnogroup USA