

# MSD300-1

## Sending Card



Specifications

## Change History

Document Version	Release Date	Description
V1.1.1	2023-08-29	Updated the product appearance diagram.
V1.1.0	2022-03-21	<ul style="list-style-type: none"> <li>Updated the product appearance diagram.</li> <li>Added the certifications description.</li> </ul>

## Introduction

The MSD300-1 is a sending card developed by NovaStar. It supports 1x DVI input and 2x Ethernet outputs. A single MSD300-1 supports input resolutions up to 1920x1200@60Hz and loads up to 1,300,000 pixels.

The MSD300-1 communicates with PC via type-B USB port. Multiple MSD300-1 units can be cascaded via UART port.

As a highly cost-effective sending card, the MSD300-1 can be mainly used in the rental and fixed installation applications, such as concerts, live events, security monitoring centers, Olympic Games and various sports centers.

## Certifications

None


**If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.**

## Features

- 1x SL-DVI input connector
  - 2x Gigabit Ethernet outputs
  - 1x light sensor connector
  - 1x type-B USB control port
  - 2x UART control ports
  - Pixel level brightness and chroma calibration
- Work with NovaStar's high-precision calibration system to calibrate the brightness and chroma of each pixel, effectively removing brightness differences and chroma differences, and enabling high brightness consistency and chroma consistency.

They are used for device cascading. Up to 20 devices can be cascaded.


## Appearance

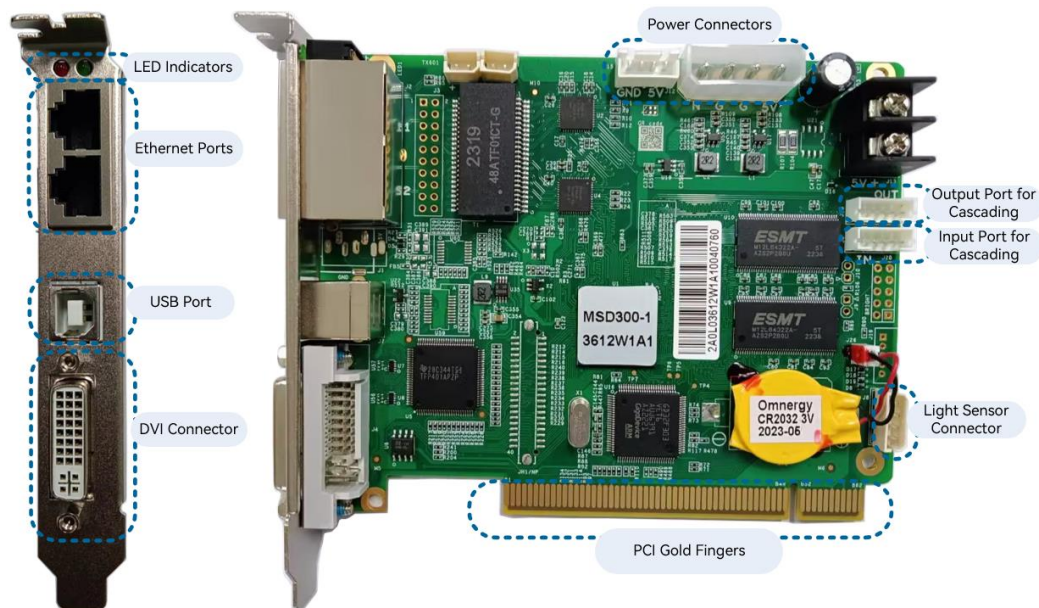

All product pictures shown in this document are for illustration purpose only. Actual product may vary.

Indicator	Status	Description
RUN (Green)	Slow flashing (flashing once in 2s)	No video input is available.
	Normal flashing (flashing 4 times in 1s)	The video input is available.
	Fast flashing (flashing 30 times in 1s)	The screen is displaying the startup image.
	Breathing	The Ethernet port redundancy has taken effect.
STA (Red)	Always on	The power supply is normal.
	Off	The power is not supplied, or the power supply is abnormal.
Connector Type	Connector Name	Description
Input	DVI	1x SL-DVI input connector <ul style="list-style-type: none"> <li>Resolutions up to 1920x1200@60Hz</li> <li>Custom resolutions supported <ul style="list-style-type: none"> <li>Maximum width: 3840 (3840x600@60Hz)</li> <li>Maximum height: 3840 (548x3840@60Hz)</li> </ul> </li> <li>DOES NOT support interlaced signal input.</li> </ul>
Output	2x RJ45	2x RJ45 Gigabit Ethernet ports <ul style="list-style-type: none"> <li>Capacity per port up to 650,000 pixels</li> <li>Redundancy between Ethernet ports supported</li> </ul>
Functionality	LIGHT SENSOR	Connect to a light sensor to monitor ambient brightness to allow for automatic screen brightness adjustment.
Control	USB	Type-B USB 2.0 port to connect to PC
	UART IN/OUT	Input and output ports to cascade devices. Up to 20 devices can be cascaded.
Power	DC 3.3 V to 5.5 V	

## Dimensions

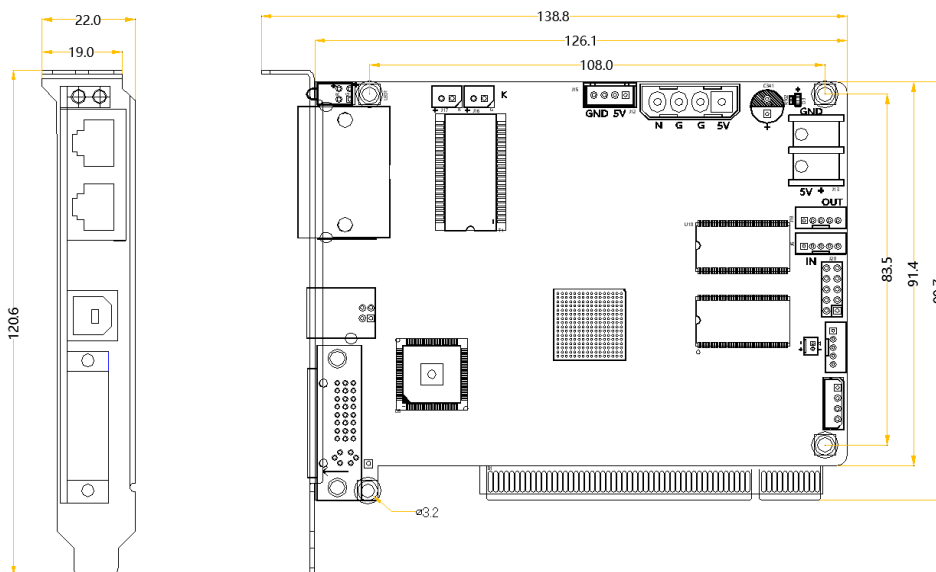

Tolerance:  $\pm 0.3$  Unit: mm

## Specifications

Electrical Specifications	Input voltage	DC 3.3 V to 5.5 V
	Rated current	0.6 A
	Rated power consumption	3 W
Operating Environment	Temperature	-20°C to +75°C
	Humidity	10% RH to 90% RH, non-condensing
Physical Specifications	Dimensions	138.8 mm x 120.6 mm x 22.0 mm
	Net weight	104.3 g Note: It is the weight of a single card only.
Packing Information	Cardboard box	335 mm x 190 mm x 62 mm Accessories: 1x USB cable, 1x DVI cable
	Packing box	400 mm x 365 mm x 355 mm

The amount of power consumption may vary depending on various factors such as product settings, usage, and environment.

## Video Source Features

Input Connector	Features		
	Bit Depth	Sampling Format	Max Input Resolution
Single-link DVI	8bit	RGB 4:4:4	1920x1200@60Hz

**TECNOGROUP**  
LED TECHNOLOGY EXPERTS

Tel: +56 9 5449 1032  
Email: [contacto@tecnogroup.cl](mailto:contacto@tecnogroup.cl)

**Casa Matriz**  
Padre Hurtado Central 580  
Las Condes, Santiago de Chile

[www.tecnogroup.cl](http://www.tecnogroup.cl)

 @tecnogroup.cl  #tecnogroup.cl  Tecnogroup Chile

Tel: 833 533 4255  
Email: [info@tecnogroup.us](mailto:info@tecnogroup.us)

**Showroom Miami**  
759 NW. 24th ST.  
Miami, FL 33127

[www.tecnogroup.us](http://www.tecnogroup.us)

 @tecnogroup.us  #tecnogroup.us  Tecnogroup USA